


# THERMICULITE<sup>®</sup>

Sealing materials for  
Solid Oxide Fuel Cells.

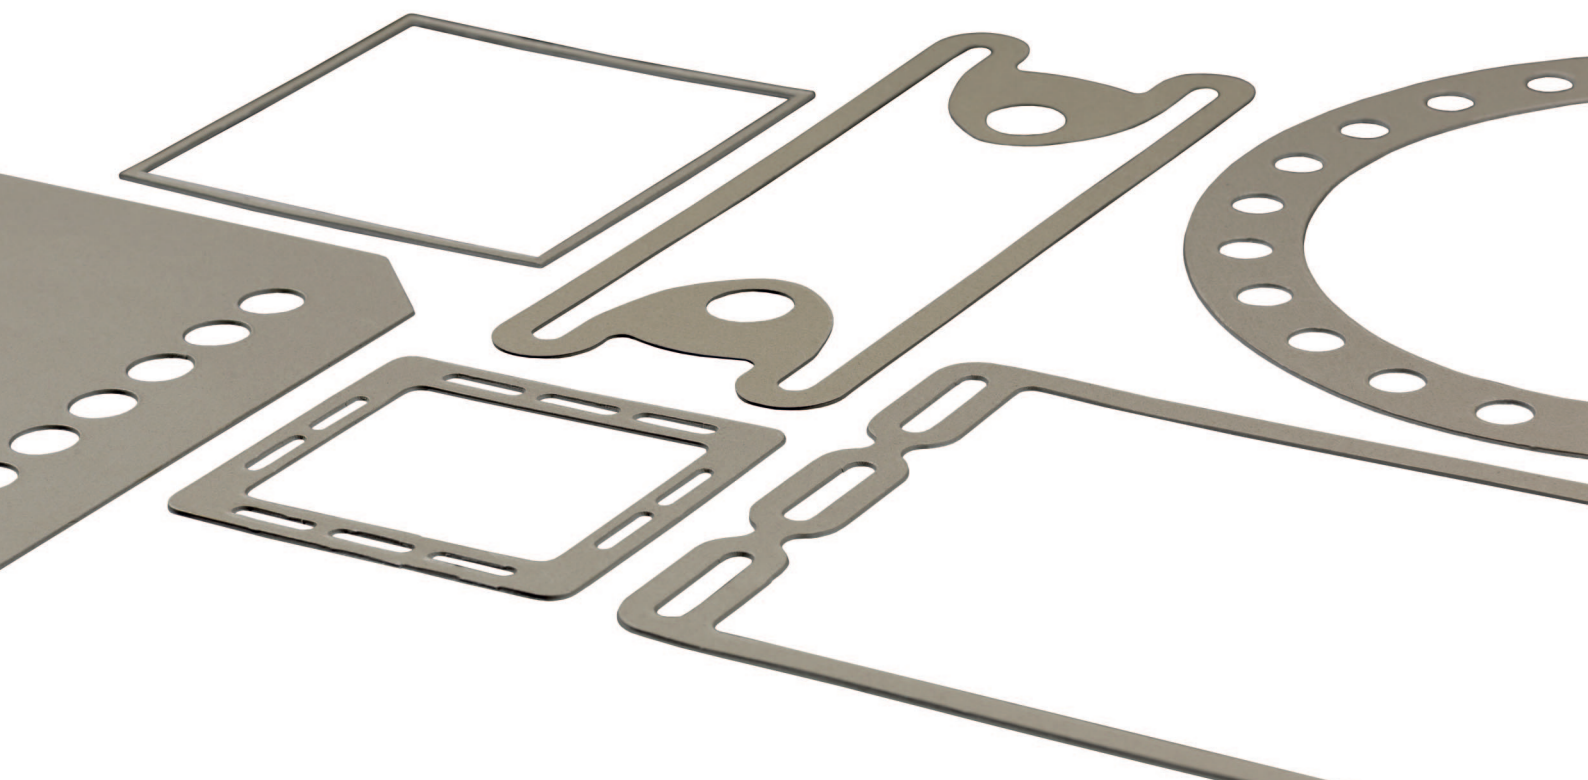

# THERMICULITE®

## PROVEN SEALING MATERIALS FOR SOLID OXIDE FUEL CELLS.

Thermiculite® 866 and 870 are sealing materials specifically designed for use as compression seals for Solid Oxide Fuel Cells (SOFC) and Solid Oxide Electrolysers (SOE). They have been used very successfully in a range of SOFC applications around the world.

TH866 and TH870 utilise the unique properties of Thermiculite® technology, based upon the use of chemically exfoliated vermiculite, developed by Flexitallic to produce a range of high performance, high temperature resistant, patented sealing materials for industrial applications.

Vermiculite is a naturally occurring mineral noted for its high temperature capability, wide chemical resistance and electrical insulation properties. Vermiculite occurs naturally as flakes which consist of a stack of very many crystal plates where each crystal plate is nanometres thick. These flakes are able to be exfoliated so that the crystal plates separate from each other.

Partial exfoliation can be achieved by the application of heat, resulting in a coarse expanded form of vermiculite however the crystal layers can also be separated efficiently from each other by chemical means which produces a form which consists of just these very thin, high aspect ratio crystal plates. The separated plates are highly flexible and have the useful property of adhering to each other to produce a thin, flexible film. The self binding nature of the vermiculite means additional compounds can be added without the need for a supplementary binder.

By exploiting these properties, Flexitallic has developed a process to produce a very compressible, flexible sheet sealing material with very tightly controlled thickness and density. The resulting sheet material can be easily cut into gaskets with complex shapes including those with narrow land widths ( $\geq 4\text{mm}$ ). The controllable manufacturing approach means sheet material can be produced in a range of thicknesses to suit different designs.

Thermiculite® ensures that a seal can be created and then maintained in service. Thermiculite® 866 is soft, resulting in a compressible and flexible material that is completely free of organic content.

Due to its unique chemical and physical properties, TH866 and TH870 are both highly temperature resistant ( $1000^{\circ}\text{C}$ ) and, as there is no organic content, there is no burn off of volatile components at SOFC operational temperatures. It also means that the sensitive cell chemistry is not poisoned.

At elevated temperature there is also no reduction in the gasket thickness and no resulting relaxation of the bolts. The seal is therefore stable during cycling between ambient and operational temperatures.


Thermiculite® 866 provides excellent service performance. Figures 3 and 4 show stack results obtained by a customer and reproduced with their full permission.

### THERMICULITE® 866


- Thermiculite® 866 is recognised as the material of choice to achieve high sealing efficiency by leading developers of SOFC technology
- Thermiculite® 866 ensures that a seal is created and then maintained in service
- No burn off of organic material at elevated temperature
- No reduction in gasket thickness at elevated temperature
- Sealing performance not reduced by thermal cycling

### THERMICULITE® 870

- Sealing achieved at very low surface stresses
- Very high compressibility
- Sealing performance not reduced by thermal cycling
- Gasket cutting just as easy for Thermiculite® 866



Crystal plates: Each crystal plate is nanometres thick



Structure of Thermiculite® 866

THERMICULITE® 866 and 870 THE PROVEN SEALING MATERIAL FOR SOFC APPLICATIONS		
Stable to high temperatures up to $1000^{\circ}\text{C}$	No thermal degradation of the seal at SOFC operating temperatures	Extended lifetime performance
No organic filler material	Excellent seal integrity maintained	Material does not become porous over time or suffer a gasket thickness reduction
Soft and compressible	Easily cut into complex shapes and profiles	Complex sealing arrangements are easily accommodated
Currently operating in service units	Case studies providing the benefits of Thermiculite® 866	Many reports of very low leakage rates even through many thermal cycles

For some SOFC designs a softer, more compressible sealing material is required. As a result of this requirement, Flexitallic developed Thermiculite® 870, building upon the knowledge and experience gained from TH866. TH870 is significantly more compressible under low loads, e.g. 1MPa. TH870 is around ten times more compressible than TH866.

**Figure 1** shows load vs deflection for TH870 compared to TH866. At a stress of 1 MPa TH870 compresses 0.22mm whereas TH866 gasket only compresses 0.02mm under the same load.

Thermiculite® 870 also seals at a comparable level to TH866, but at much lower applied loads. This is the case at ambient and elevated temperatures. **Figure 2** shows an 80 hour leakage test at ambient temperature.


For more information see Introduction of a *Low Sealing Stress Vermiculite Based Compression Gasket for SOFCs*; S Bond & S Shaw, ECS Trans. 2018 83(1): 159-170.

### LS COATING






Thermiculite® 866 can be offered with an additional glass based surface coating. This material is known as **TH866LS**. A thin coating of glass powder is bound to each surface of the sheet during the manufacturing process so that at the operational temperature of the SOFC cell the coating melts therefore reducing the interfacial leakage paths.

No initial glass sintering cycle to above the operating temperature of the SOFC stack is required with Thermiculite® 866 LS. Provided the service temperature is at least 700°C the glass coating will form the required seal.

Please note 866LS has now been superseded by TH870 material.

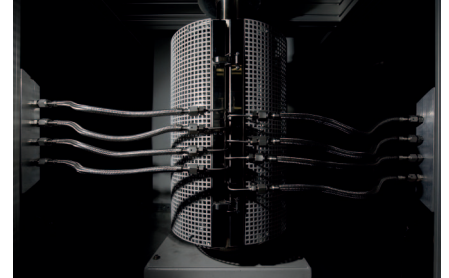

Advanced test equipment aided Flexitallic's development of Thermiculite® 866

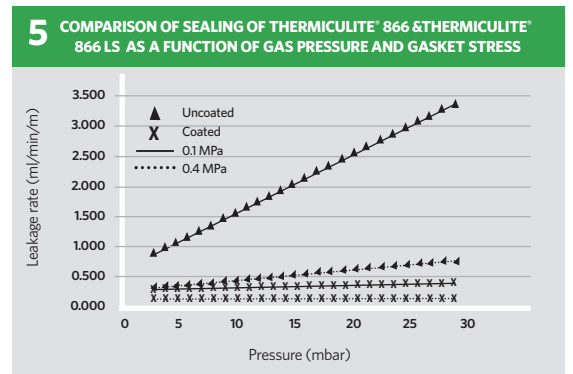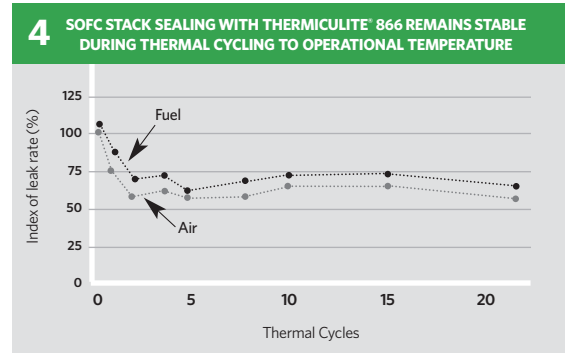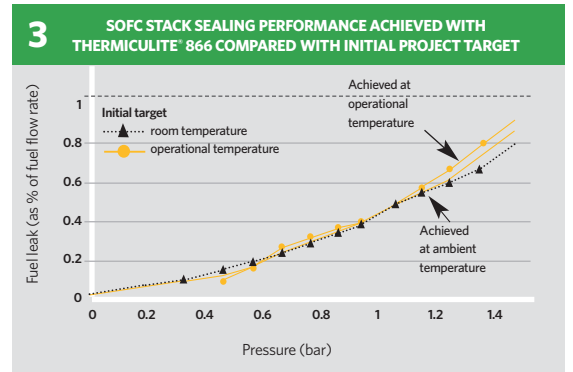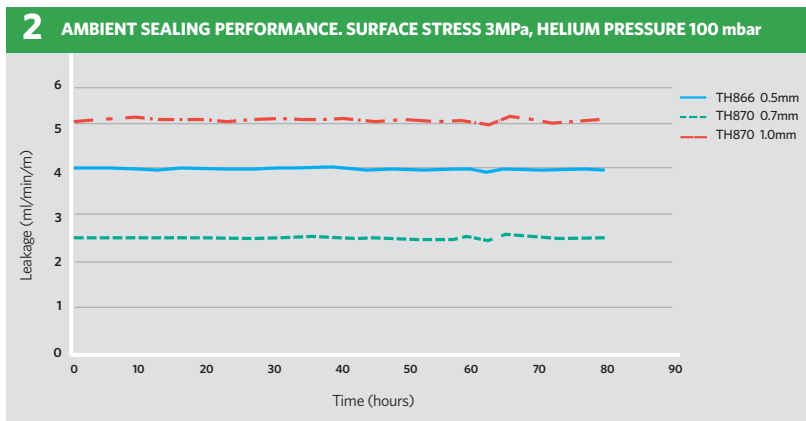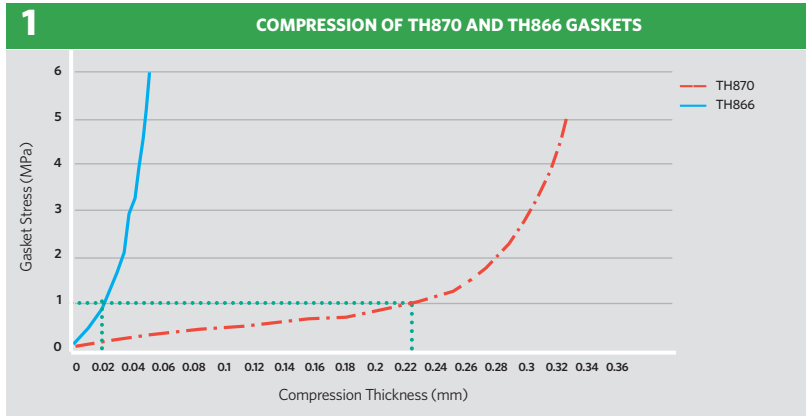

Reference: M. Rautanen et al, J. Power Sources 247 (2014) 243-248

### UNITED KINGDOM

#### Flexitallic UK Ltd.

Scandinavia Mills  
Hunsworth Lane  
Cleckheaton  
West Yorkshire, BD19 4LN  
UK  
Tel: +44 1274 851273  
customerservice@flexitallic.eu

*Branches also in Aberdeen,  
Middlesbrough, Ellesmere Port  
and South West.*

### ITALY

#### Flexitallic Italy Sr.l

Via Leonardo Da Vinci 6B  
26020 Ticengo CR  
ITALY  
Tel: +39 0374 71006  
info@flexitallic.it

### INDIA

#### Flexitallic India Pvt. Ltd.

Building GB320, Unit B  
Talegaon Industrial Parks Pvt. Ltd.  
Gut No:12, Maval Taluka  
Badhalawadi  
Pune - 410507  
Maharashtra  
INDIA  
Tel: +91 9850577447  
customerservice@flexitallic.in

### FRANCE

#### Siem Supranite

*a Flexitallic Company*

31-33 Rue de Mogador  
75009 Paris  
FRANCE  
Tel: +33 (0)1 48 88 88 88  
contact@supranite.com  
**www.siem.fr**

### UNITED ARAB EMIRATES

#### Flexitallic LLC

PO Box No. 6591-AI Jazeera  
Plot 108, Road E  
Al Hamra Industrial Area  
Ras Al Khaimah  
UNITED ARAB EMIRATES  
Tel: +971 7 202 5300  
sales-me@flexitallic.com

*Branches also in Abu Dhabi,  
Oman and Qatar.*

### AUSTRALIA

#### Flexitallic Australia Pty Ltd.

13-15 Vinnicombe Drive  
Canning Vale  
Perth, WA 6155  
AUSTRALIA  
Tel: +61 (0)8 9455 2155  
customerservice@flexitallic.au

*Branch also in Melbourne,  
Victoria.*

### GERMANY

#### Flexitallic GmbH

Halskestr. 13  
47877 Willich  
GERMANY  
Tel: +49 (0) 2154 95363-0  
customerservice@flexitallic.de

### CHINA

#### Flexitallic Gasket Technology (Suzhou) Co., Ltd

Building A, 1868 Guangming Rd  
Technological Development Zone  
Wujiang Economic 215200  
CHINA  
Tel: +86 512 6303 2839  
FGT-customerservice@flexitallic.com

### UNITED STATES

#### Flexitallic US LLC

6915 Highway 225  
Deer Park  
Texas 77536  
USA  
Tel: +1 281 604 2400  
dpquotes@flexitallic.com

### MEXICO

#### Flexitallic Mexico/Equiter SA de CV

Calle 28 #2571  
Zona Industrial Bienestar Social  
Guadalajara, Jalisco  
MEXICO. CP 44940  
Tel: +52 33 3145 3454/1763  
mexico@flexitallic.com

### BENELUX

#### Flexitallic Benelux BVBA

Smallandlaan 21  
2660 Hoboken  
BELGIUM  
Tel: + 32 3 369 19 68  
benelux@flexitallic.eu

### THAILAND

#### Flexitallic Sealing Technology Co Ltd.

No. 7/456, Moo 6,  
Amata City Rayong Industrial Estate  
Mabyangporn Sub-district  
Pluak Daeng District  
Rayong Province  
THAILAND  
Tel: +66 (0)33017561 - 3  
FST-customerservice@flexitallic.com

### CANADA

#### Flexitallic Canada Ltd.

4340 - 78 Avenue  
Edmonton  
Alberta, T6B 3J5  
CANADA  
Tel: +780 466 5050  
Sales@flexitallic.ca

### About The Flexitallic Group

The Flexitallic Group is a global leader in specialised sealing solutions and products serving the oil and gas, power generation, chemical and petrochemical industries in emerging and developed markets. Focused on the upstream, downstream and power generation sectors, it has operations in France, the United States, Canada, Mexico, the United Kingdom, Germany, Italy, Belgium, the Middle East, India, Thailand, Australia and China plus a network of worldwide licensing partners and distributors.